
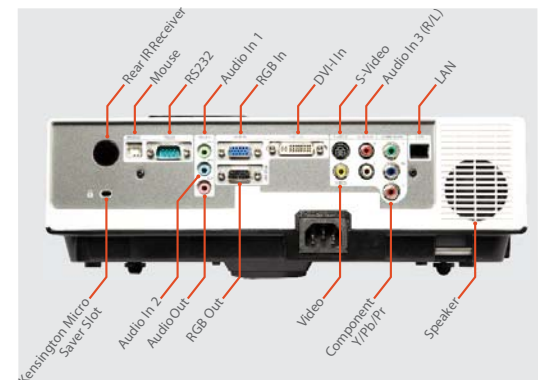


Model	SEATTLE X40N
Technology	.63" 3LCD 
Brightness	4000 Lumen (Standard) 2700 (economy mode)
Native Resolution	1024 x 768 (XGA)
Supported Resolution	up to 1600 x 1200 (UXGA)
Brightness Uniformity	78%<
Projection Methods	Desktop front/rear, Ceiling front/rear
Colors	16.7 million true color
Contrast Ratio	600:1
Aspect Ratio	Native 4:3; Compatible 16:9
Image Size	40"-300" inches / 101.6-762 cm
Projection Distance	5' to 30' ft / 1.5 to 9.1 meters
Lens Shift	N/A
Throw Ratio	1.45~1.73 (manual zoom and focus)
Zoom Ratio	1.2:1
Digital Zoom	4x zoom with pan function
Keystone Correction	Vertical +/- 30 degrees, auto
Horizontal Scan Rate	31 to 92kHz
Vertical Scan Rate	48 to 120Hz
Audio Output	1 x 8W mono
Lamp	245W
Lamp Life	3000/4000 hours (standard/economy)
Remote Control	Full function IR remote with laser pointer
Noise Level	>33dB eco mode
Power Supply	Universal AC Input 100-240V at 50-60Hz
Power Consumption	310W <2.6W standby mode
Safety Certifications	FCC-B, UL, cUL,TUB, CD, CE, CCC
Computer Compatibility	UXGA, SXGA+, SXGA, XGA, SVGA, VGA Resized; VESA Standards; PC and Macintosh Compatible
Video Compatibility	EDTV (480p), HDTV (576i/p, 720p, 1080i), NTSC/NTSC 4.43, PAL B/G/H/I/M/N 60, SECAM
Connectivity	VGA, DVI-I, Composite Video with 2 RCA (R/L) audio-in, Component Video, S-video, Audio 3.5mm-in x 2, LAN, RS232, USB port for mouse control, VGA and 3.5 mm outputs
Service and Network Control	RS232, RJ45
Weight	7.3 lbs / 3.3 kg
Dimensions (W x H x D)	12.8" x 10.24" x 3.8"
Operating Temperature	N/A
Security	Kensington® Lock Port, Keypad lock, Anchor security bar, password security
Standard Accessories	AC power cord, VGA cable, USB cable, Remote Control with batteries, User manual (cd), Carrying Case
Optional Accessories	Replacement lamp, replacement remote, ALLINONE ceiling mount, USB-Booster
Warranty	3 year parts & labor 90 day/500 hour lamp warranty




Key Features

- Side changing lamp & filter
- Quick off/on
- Advanced Anti-theft features, Kensington® lock, Keypad lock, Security Anchor bar
- Five auto features (Auto Search, Auto Sync, Auto Ceiling, Auto Keystone and Auto Filter Alert)
- Seven display modes (Natural, Cinema, Daylight, Green board, White Board, Black, Board and User)
- Built-in 8W Mono Speaker
- Logo capture
- Image freeze function
- Digital zoom adjustment up 4x
- Built in Network Control software via RJ45 (LAN) connection
- Multi Language OSD (On-Screen Display)
- Closed Caption
- Monitor loop through
- Optional harsh enviro filter
- TAA compliant



Throw Distance (ft)

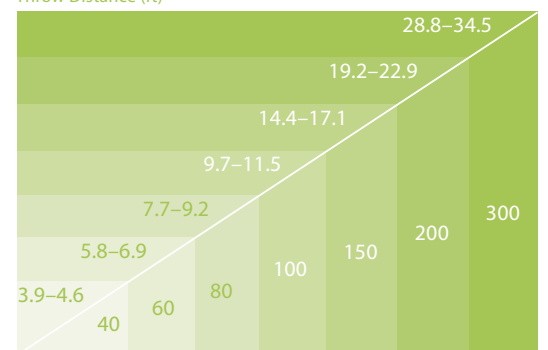

Diagonal Image Size (inches)

Outstanding Technical Support 24/7/365

And, of course, all BOXLIGHT products all come with free lifetime technical support. Speak with a hands-on, in-house, ISF Certified® technician ready to service your projector should the need arise.

© 2011 BOXLIGHT, Inc. Specifications subject to change without notice.
Helps meet ADA Section 508 compliance
BOXLIGHT NE 151 Highway 300, Suite A PO Box 2609 Belfair, WA 98528

